


Model: DL

NL	Sideshift frame	
FR	Cadre de déplacement latéral	
EN	Sideshift frame	
DE	Seitenschieberrahmen	

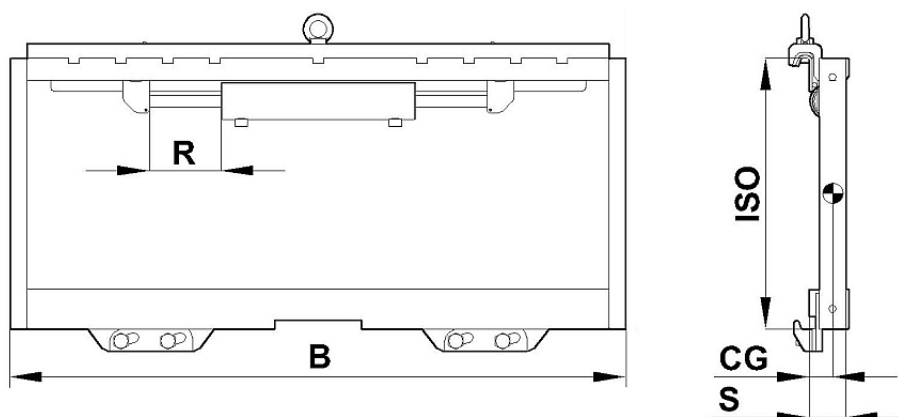

Mod nr	Cap. Q Kg/mm	B mm	K mm	R mm	CG mm	S mm	Gewicht kg	FEM / ISO
DL10L080	1000/500	800	800	100+100	26	60	41	1
DL10L083	1000/500	835	800	100+100	26	60	42	1
DL10L085	1000/500	850	800	100+100	26	60	43	1
DL25L092	2500/500	920	800	100+100	25	60	39	2
DL25L097	2500/500	970	800	100+100	25	60	40	2
DL25L100	2500/500	1000	800	100+100	25	60	41	2
DL25L102	2500/500	1020	800	100+100	25	60	42	2
DL25L104	2500/500	1040	800	100+100	25	60	43	2
DL25L110	2500/500	1100	800	100+100	25	60	45	2
DL25L115	2500/500	1150	800	100+100	25	60	47	2
DL25L130	2500/500	1300	1000	100+100	25	60	52	2
DL25L137.AL	2500/500	1370	1200	100+100	25	60	70	2
DL25L147.AL	2500/500	1470	1200	100+100	28	60	74	2
DL25L180	2500/500	1800	1200	100+100	27	60	87	2
DL30L175	3000/500	1750	1400	100+100	33	74	131	3
DL50L107	4900/500	1070	800	100+100	32	74	89	3
DL50L115	4900/500	1150	800	100+100	32	74	92	3
DL50L119	4900/500	1190	1000	100+100	32	74	94	3
DL50L122	4900/500	1220	1000	100+100	32	74	96	3
DL50L140	4900/500	1400	1000	100+100	32	74	100	3
DL65K120	6500/600	1200	1000	125+125	35	85	197	4
DL65K122.164	6500/600	1220	1000	125+125	35	85	175	4
DL65K150	6500/600	1500	1000	125+125	35	85	234	4
DL65K180	6500/600	1800	1000	125+125	35	85	275	4
DL28L080	2500/500	800	940	150+150	26	60	50	2
DR25I009	2500/500	820/620	500	100+100	25	60	37	2

NL 1 Hydraulische functie**Opties:** - Vorken

R = Zijverplaatsing

Zonder vorken

K = Minimum bevestigingsbreedte frame

Q = Capaciteit / Ladingcenter

Model: DL

FR 1 fonction hydraulique **Options:** - Fourches

R = Déplacement latéral

Sans Fourches

K = Largeur de montage minimale

Q = capacité / centre de chargement

ENG 1 Hydraulic function **Options:** - Forks

R = Lateral displacement

Without forks

K = Minimum mounting width frame

Q = Capacity / Load center

DE 1 Hydraulikfunktion **Optionen:** - Gabeln

R = Seitliche Verschiebung

Ohne Gabeln

K = Mindest einbaubreite Rahmen

Q = Kapazität / Ladezentrum
